PLANTING SCHEDULE

KEY	QUANTITY	SCIENTIFIC NAME	COMMON NAME	SIZE	CAL.	ROOT	COMMENTS
TREES							
QV	12	QUERCUS VIRGINIANA	LIVE OAK	12'-14' HT	2-2.5"	B&B	FULL, DENSE SPECIMEN
HERBACEOUS PLANTS							
KEY	QUANTITY	SCIENTIFIC NAME	COMMON NAME	SIZE	CAL.	ROOT	COMMENTS
AC	5730	ACORUS CALAMUS	SWEET FLAG	1 QT	-	CON	
HM	2865	HIBISCUS MOSCHEUTOS	MARSH HIBISCUS	1 QT	-	CON	
JR	4584	JUNCUS ROEMERIANUS	BLACK NEEDLERUSH	1 QT	-	CON	
SR	1910	SCIRPUS ROBUSTUS	SALTMEADOW BULRUSH	1-3/4"	-	CON	TUBE-LIKE STEMS

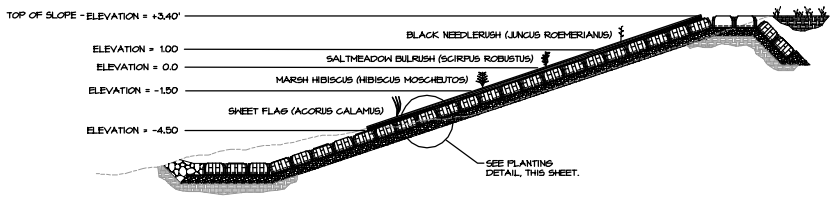

VEGETATION DETAIL

NO SCALE

SEEDING SCHEDULE

TEMPORARY SEED	
100% ANNUAL RYE	FEB 16 - APR 30
100% MILLET	MAY 1 - AUG 31
50% ANNUAL RYE	SEPT 1 - FEB 15
50% WINTER RYE	SEPT 1 - FEB 15

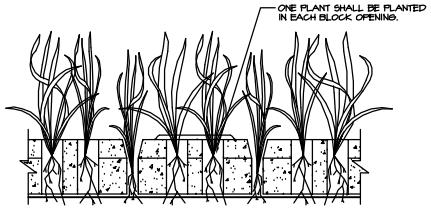

PLANTING DETAIL

NO SCALE



NOTES:

1. LIME SHALL BE FINELY GROUND DOLOMITIC AGRICULTURAL LIMESTONE CONTAINING AT LEAST 94% OF TOTAL CARBONATES.
2. FERTILIZER SHALL BE 15-30-15 FORMULA.
3. AFTER SEEDING, THE AREA SHALL BE RAKED, ROLLED, WATERED AND MULCHED IN AN APPROVED MANNER.
4. THE CONTRACTOR SHALL MAINTAIN ALL GRASSED AREAS TO PROVIDE FOR A SMOOTH UNIFORM TURF UPON COMPLETION OF THE CONTRACT.

SEEDING DETAIL

NO SCALE

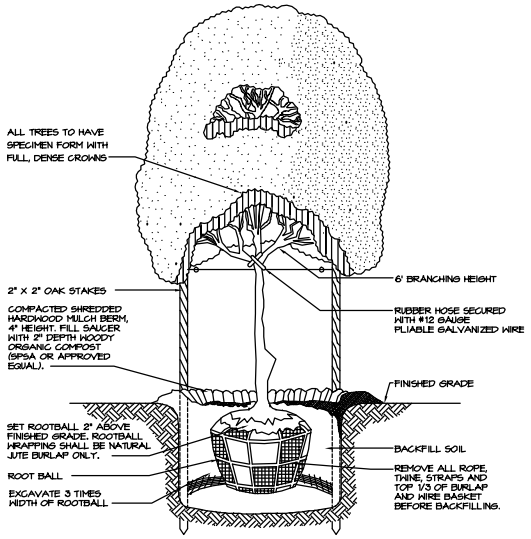

TREE PLANTING DETAIL

NO SCALE

CLARK • NEXSEN
Architecture & Engineering

6160 KEMPSVILLE CIRCLE
NORFOLK, VIRGINIA 23502
757-455-5800 FAX 757-455-5638
WWW.CLARKNEXSEN.COM

50% SUBMITTAL

COLONIAL PLACE SHORELINE STABILIZATION

PHASE IIA

CITY OF NORFOLK, VIRGINIA
DEPARTMENT OF PUBLIC WORKS

CN NO: 1654.28
DATE: 06/27/03
DESIGN: ALB
DRAWN: ALB
REVIEW: KMK

REVISIONS

No.	Date	Description	By

LANDSCAPE DETAILS

LP501

SHEET 16 OF 16