

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT				1. CONTRACT ID CODE		PAGE OF PAGES 1 2	
2. AMENDMENT/MODIFICATION NO. 0009		3. EFFECTIVE DATE 25-Jan-2002		4. REQUISITION/PURCHASE REQ. NO. W26GLG11996435		5. PROJECT NO.(If applicable)	
6. ISSUED BY CONTRACTING OFFICE (CA/CW) US ARMY ENGR DIST NORFOLK ATTN: CENAO-CT 803 FRONT STREET NORFOLK VA 23510-1096		CODE DACA65		7. ADMINISTERED BY (If other than item 6)		CODE	
				See Item 6			
8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)				X		9A. AMENDMENT OF SOLICITATION NO. DACA65-01-R-0025	
				X		9B. DATED (SEE ITEM 11) 21-Aug-2001	
						10A. MOD. OF CONTRACT/ORDER NO.	
						10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					
11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS							
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer <input checked="" type="checkbox"/> is extended, <input type="checkbox"/> is not extended.							
Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning _____ copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.							
12. ACCOUNTING AND APPROPRIATION DATA (If required)							
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.							
A.THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.							
B.THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).							
C.THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:							
D.OTHER (Specify type of modification and authority)							
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input type="checkbox"/> is required to sign this document and return _____ copies to the issuing office.							
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.) AMENDMENT NO. 0009 TO DACA65-01-R-0025, F-22 FACILITIES, LANGLEY AIR FORCE BASE, VA							
<small>Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.</small>							
15A. NAME AND TITLE OF SIGNER (Type or print)				16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)			
15B. CONTRACTOR/OFFEROR		15C. DATE SIGNED		16B. UNITED STATES OF AMERICA		16C. DATE SIGNED	
_____ (Signature of person authorized to sign)				BY _____ (Signature of Contracting Officer)		25-Jan-2002	

SECTION SF 30 BLOCK 14 CONTINUATION PAGE

1. PROPOSAL DUE DATE IS HEREBY CHANGED TO FEBRUARY 5, 2002 at 1:00 pm. The proposal shall be delivered to U.S. Army Engineer District, Norfolk, 803 Front Street, ATTN: CENAO-SS-C/Contracting Office, Norfolk, VA 23510-1096.
2. SECTION 00010: DELETE BIDDING SCHEDULE in its entirety and REPLACE with the attached.
3. Technical plans and specifications are amended. Make appropriate changes in accordance with the attached.

SECTION 00010 Solicitation Contract Form

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0001	SCHEDULE I - BASE BID FFP - Construct Squadron Operations/AMU Hangar, Building 754, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0002 thru 0044.	1.00	Lump Sum		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0002	FFP - Base Operations Facility, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 and 0003 thru 0044.	1.00	Lump Sum		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0003	FFP - Airfield Lighting Vault, complete including all work incidental thereto as shown on the drawings and specified of bid items 0001, 0002 and 0004 thru 0044.	1.00	Lump Sum		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0004		1.00	Lump Sum		
	FFP - Sitework for bid items 0001, 0002 and 0003, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0003 and 0005 thru 0044.				
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0005		7,611.00	SY		
	FFP - Airfield Concrete Pavement associated with Squadron/AMU Building 754, complete, including all work incidental thereto as shown on the drawings and as specified exclusive of bid items 0001 thru 0004 and 0006 thru 0044.				
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0006		1.00	Lump Sum		
	FFP - Low Observable/Composite Repair Facility (LOCRF), complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0005 and 0007 thru 0044.				
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0007		1.00	Lump Sum		
	FFP - Sitework associated with bid item 0006, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0006 and 0008 thru 0044.				
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0008		5,319.00	SY		
	FFP - Airfield Concrete Pavement associated with Low Observable/Composite Maintenance Facility, complete, including all work incidental thereto as shown on the drawings and as specified exclusive of bid items 0001 thru 007 and 0009 thru 0044.				
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0009		1.00	Lump Sum		
	FFP - Fire Pump House, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0008 and 0010 thru 0044.				
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0010	FFP - Sitework associated with Bid Item 0009, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0009 and 0011 thru 0044.	1.00	Lump Sum		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0011	FFP - Airfield Lighting Ductbank and Circuits complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0010 and 0012 thru 0044.	1.00	Lump Sum		
					<hr/>
NET AMT					

SCHEDULE II - OPTIONS
DRAWING OPTION NO. 1 Not Used
DRAWING OPTION NO. 2 Not Used

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0012	FFP - Drawing OPTION NO. 3 as described as 24" x 12" Oversized CMU Plinth in lieu of Precast Plinth, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0011 and 0013 thru 0044.	1.00	Lump Sum		
					<hr/>
NET AMT					

DRAWING OPTION NO. 4 Not Used
DRAWING OPTION NO. 5 Not Used
DRAWING OPTION NO. 6 Not Used

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
---------	-------------------	----------	------	------------	--------

0013	FFP - Drawing OPTION NO. 7 as described as Recycle structural steel and turnover to Government for Demolition of Hangar 754, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0012 and 0014 thru 0044.	950	Tons		
------	---	-----	------	--	--

NET AMT

DRAWING OPTION NO. 8 Not Used

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
---------	-------------------	----------	------	------------	--------

0014	FFP - Drawing OPTION NO. 9 as described as Electrical System Upgrade, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0013 and 0015 thru 0044.	1.00	Lump Sum		
------	--	------	----------	--	--

NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
---------	-------------------	----------	------	------------	--------

0015	FFP - Option FFP- Drawing OPTION NO. 10 as described as Construct Squadron Operations/AAMU Hangar, Building 756, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0014 and 0016 thru 0044.	1.00	Lump Sum		
------	---	------	----------	--	--

NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0016	FFP - Sitework associated with bid item 0015, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0015 and 0017 thru 0021.	1.00	Lump Sum		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0017	FFP - Airfield Concrete Pavement associated with Squadron Operations/AMU Building 756, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0016 and 0018 thru 0044.	4,445.00	SY		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0018	FFP - Drawing OPTION NO. 11 as described as Recycle Structural Steel and Turn Over to the Government for Demolition of Hangar 756, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0017 and 0019 thru 0044.	950	Tons		
					<hr/>
NET AMT					

DRAWING OPTION NO. 12 Not Used

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0019	FFP - Drawing OPTION NO. 13 as described as Demolition Squadron Operations/AMU Hangar, Building 755, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0018 and 0020 thru 0044.	1	Lump Sum		
					<hr/>
					NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0020	FFP - Sitework associated with bid item 0019, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0019 and 0021 thru 0044.	1	Lump Sum		
					<hr/>
					NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0021	FFP - Airfield Concrete Pavement associated with Squadron Operations/AMU Building 755 Demolition, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0020 and 0022 thru 0044.	3615	SY		
					<hr/>
					NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0022	FFP - Drawing OPTION NO. 14 as described as Recycle Structural Steel and Turn Over to the Government for Demolition of Hangar 755, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0021 and 0023 thru 0044.	950	Tons		

NET AMT

Drawing OPTION NO. 15 Not Used

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0023	FFP - Drawing OPTION NO. 16 Construct Squadron Operations/AMU Hangar, Building 755, complete including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0022 and 0024 thru 0044.	1.00	Lump Sum		

NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0024	FFP - Sitework associated with bid item 0023, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0023 and 0025 thru 0044.	1.00	Lump Sum		

NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0025	FFP - Airfield Concrete Pavement associated with Squadron Operations/AMU Building 755, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0024 and 0026 thru 0044.	720	SY		
					<hr/>
					NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0026	FFP - Waste Characterization of Soil, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0025 and 0027 thru 0044.	10	SAMP		
					<hr/>
					NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0027	FFP - Excavation Stockpiling, Transportation and Disposal of Soil Characterized as Noncontaminated Waste, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0026 and 0028 thru 0044.	100	BCY		
					<hr/>
					NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0028	FFP - Excavation, Stockpiling, Transportation and Disposal of Soil Characterized as Noncontaminated waste (unit price per yard above the first 100 BCY), complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0027 and 0029 thru 0044.	100	BCY		

NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0029	FFP - Excavation, Stockpiling, Transportation and Disposal of Soil Characterized as Hazardous Waste, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0028 and 0030 thru 0044.	100	BCY		

NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0030	FFP - Excavation, Stockpiling, Transportation and Disposal of Soil Characterized as Hazardous Waste (unit price per yard above the first 100 BCY), complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0029 and 0031 thru 0044.	100	BCY		

NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0031	FFP - Excavation, Stockpiling, Transportation and Disposal of Soil Characterized as Special Waste, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0030 and 0032 thru 0044.	100	BCY		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0032	FFP - Excavation, Stockpiling, Transportation and Disposal of Soil Characterized as Special Waste (unit price per yard above the first 100 BCY), complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0031 and 0033 thru 0044.	100	BCY		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0033	FFP - Waste Characterization of Groundwater, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0032 and 0034 thru 0044.	10	SAMP		
					<hr/>
NET AMT					

•

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0035		5000	GAL		

FFP - Removal, Transportation and Disposal of Groundwater Characterized as Non-Contaminated Waste (unit price per gallon above the first 5,000 gallons), complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0034 and 0036 thru 0044.

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0036		5000	GAL		

FFP - Removal, Transportation and Disposal of Groundwater Characterized as Hazardous Waste, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0035 and 0037 thru 0044.

NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0037	FFP - Removal, Transportation and Disposal of Groundwater Characterized as Hazardous Waste (unit price per gallon above the first 5,000 gallons), complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0036 and 0038 thru 0044.	5000	GAL		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0038	FFP - Removal, Transportation and Disposal of Groundwater Characterized as Special Waste, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0037 and 0039 thru 0044.	5000	GAL		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0039	FFP - Removal, Transportation and Disposal of Groundwater Characterized as Special Waste (unit price per gallon above the first 5,000 gallons), complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0038 and 0040 thru 0044.	5000	GAL		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0040	FFP - Removal, and Disposal of Residual UST Sludge Classified as Hazardous Waste, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0039 and 0041 thru 0044.	20	GAL		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0041	FFP - Removal, and Disposal of Residual Petroleum Product from UST's, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0040 and 0042 thru 0044.	20	GAL		
					<hr/>
NET AMT					

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0042	FFP - On-Site Treatment of Groundwater contaminated with Petroleum Hydrocarbons, complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0041 and 0043.	5000	GAL		
					<hr/>
NET AMT					



ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0043	FFP - On-Site Treatment of Groundwater contaminated with Petroleum Hydrocarbons (unit price per gallon above the first 5,000 gallons), complete, including all work incidental thereto as shown on the drawings and specified exclusive of bid items 0001 thru 0043.	5000	GAL		

NET AMT

ITEM NO	SUPPLIES/SERVICES	QUANTITY	UNIT	UNIT PRICE	AMOUNT
0044	FFP - TOTAL - SCHEDULE I + SCHEDULE II	.00			

NET AMT

8'-0"

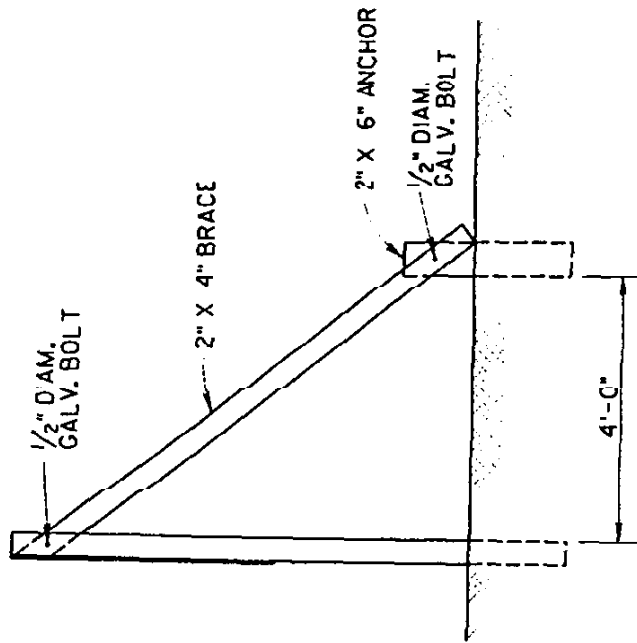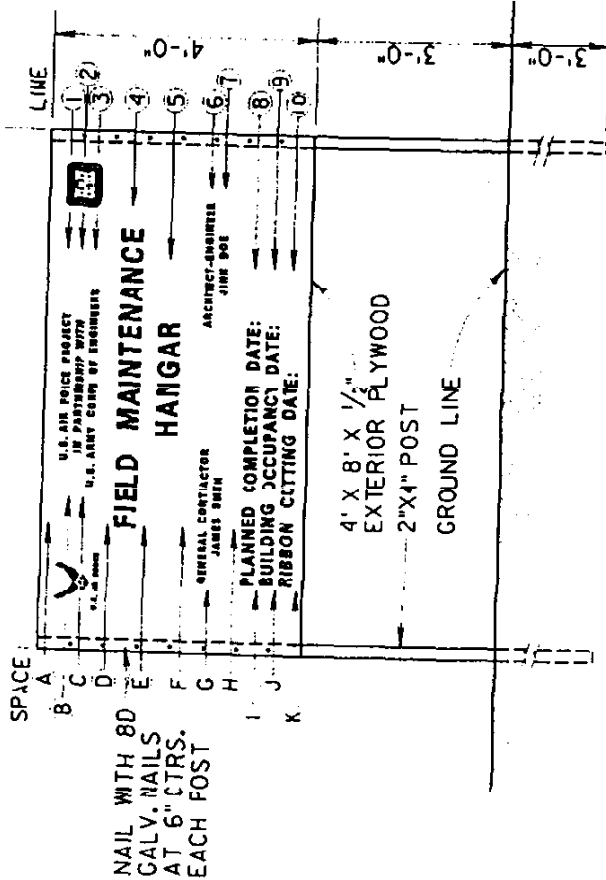

FRONT VIEW

END VIEW

U.S. AIR FORCE ACC MCP PROJECT SIGN DETAILS


NOTES:

1. POSTS SHALL BE S4S.
2. PLYWOOD SHALL BE EXTERIOR TYPE, A-C GRADE.
3. BEFORE PAINTING, SURFACE SHALL BE CLEAN, DRY, FREE OF GREASE AND SANDED.
4. PAINT WITH ONE EXTERIOR OIL PRIME COAT AND EXTERIOR TYPE ALKYD, CONFORMING TO MASTER PAINTERS' INSTITUTE MPI-9, MPI CROSS LEVEL 6. COLOR SHALL MATCH SHERWIN WILLIAMS SW 2175.
5. ALL LETTERING SHALL BE EXTERIOR TYPE ALKYD. COLOR SHALL MATCH SHERWIN WILLIAMS SW 1900.
6. DISCALOMANIA FOR CORPS OF ENGINEERS INSIGNIA AND U.S. AIR FORCE EMBLEM WILL BE FURNISHED BY THE CONTRACTING OFFICER FOR INSTALLATION BY THE CONTRACTOR.
7. ALL EXPOSED WOOD (POSTS, SUPPORTS, BACK, ETC.) SHALL BE PAINTED THE SAME BACKGROUND COLOR AS THE SIGN.
8. LETTERING STYLE SHALL BE EITHER HELIOS EXTRA BOLD CONDENSED, HELIOS BOLD II, HELVETICA BLACK ROMAN, OR HELVETICA BOLD ROMAN.


SCHEDULE			
SPACE	HEIGHT	DESCRIPTION	LETTER HEIGHT
A	3"	U.S. AIR FORCE PROJECT	1.5"
B	1"	IN PARTNERSHIP WITH	1.5"
C	1"	U.S. ARMY CORPS OF ENGINEERS	1.5"
D	4"	PROJECT NAME	1"
E	3"	GENERAL CONTRACTOR/A-E	1.5"
F	4"	GENERAL CONTRACTOR/A-E	1.5"
G	1"	PLANNED COMPLETION DATE	2.5"
H	1"	BUILDING OCCUPANCY DATE	2.5"
I	1"	RIBBON CUTTING DATE	2.5"
J	1"		2.5"
K	2"		2.5"

Attach 2

SIGN ERECTION DETAILS

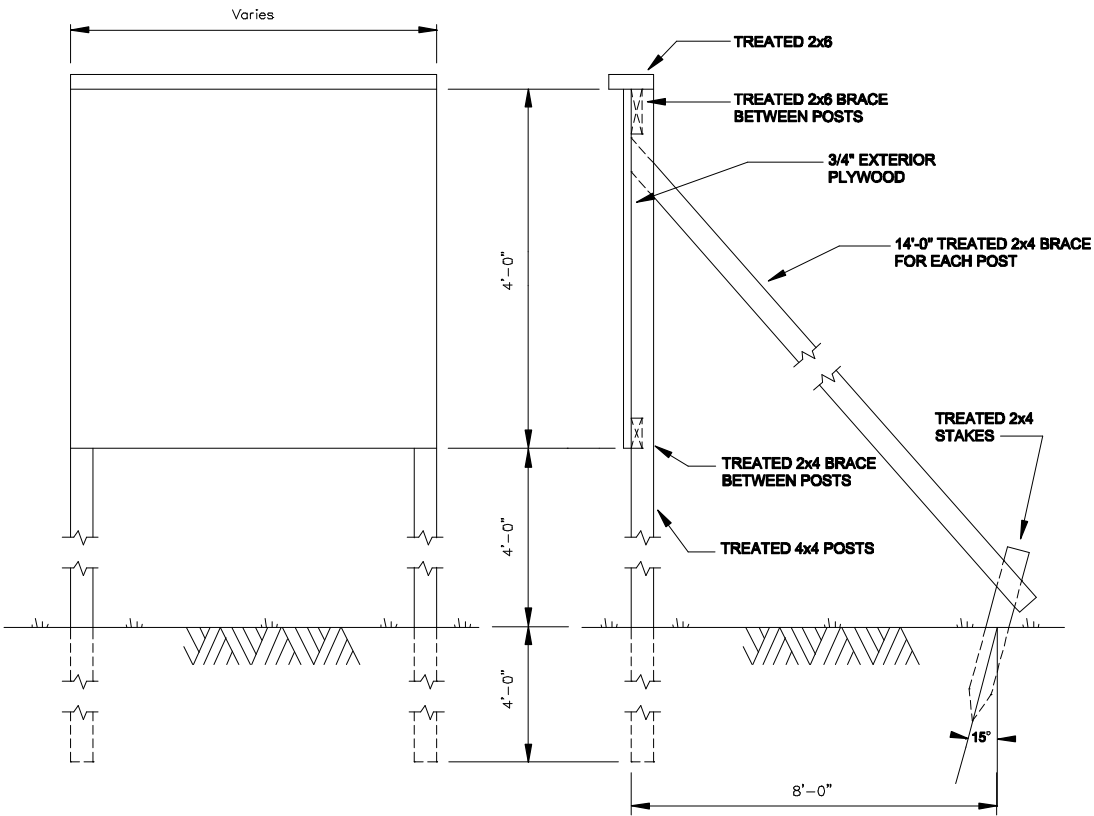

SAFETY SIGN

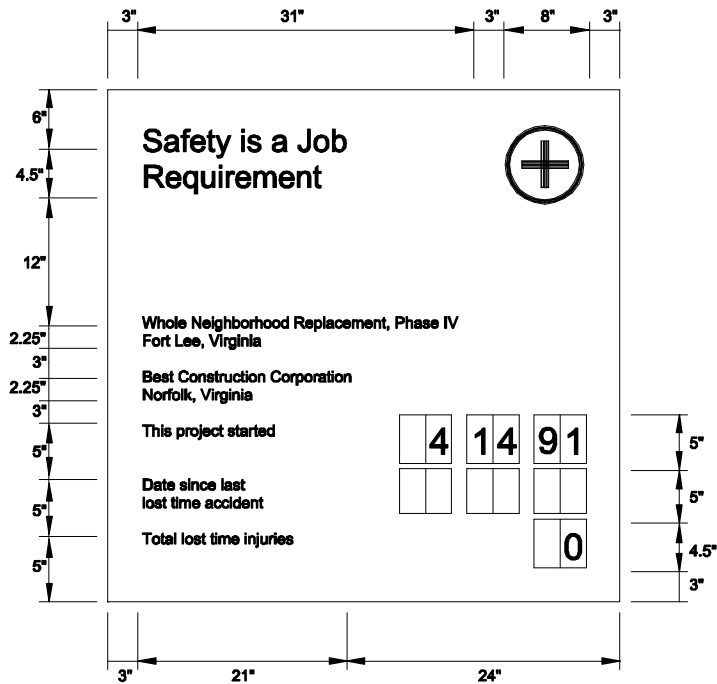


All typography is flush left and rag right, upper and lower case with initial capitals only as shown. Letter and word spacing to follow Corps Standards (EP 310-1-6a and 6b).

Legend Group 1: Standard two-line title "Safety is a Job Requirement" with (8" od.) Safety Green First Aid logo. Typeface: 3" Helvetica Bold; Color: Black.

Legend Group 2: One to two-line project title legend describes the work being done under this contract and name of host project. Typeface: 1.5" Helvetica Regular; Color: Black; Maximum line length: 42".

Legend Group 3: One to two-line identification: name of prime contractor and city, state address. Typeface: 1.5" Helvetica Regular; Color: Black; Maximum line length: 42".

Legend Group 4: Standard safety record captions as shown. Typeface 1.25" Helvetica Regular; Color: Black.

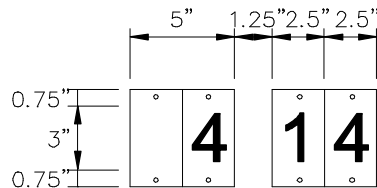

Replaceable numbers are to be mounted on white 0.060 aluminum plates and screw-mounted to backdrop. Typeface: 3" Helvetica Regular; Color: Black; Plate size: 2.5"x 4.5".

SECTION 01500
TEMPORARY CONSTRUCTION FACILITIES

07/00

PART 1 GENERAL

1.1 GENERAL REQUIREMENTS

1.1.1 Site Plan

The Contractor shall prepare a site plan indicating the proposed location and dimensions of any area to be fenced and used by the Contractor, the number of trailers to be used, entrance(s), utilities, and details of the fence installation. Any areas which may have to be graveled to prevent the tracking of mud shall also be identified. The Contractor shall also indicate any supplemental or other staging area.

1.1.2 Identification of Employees

The Contractor shall be responsible for furnishing to each employee and for requiring each employee engaged on the work to display identification as approved and directed by the Contracting Officer. Prescribed identification shall immediately be delivered to the Contracting Officer for cancellation upon release of any employee. When required, the Contractor shall obtain and provide fingerprints of persons employed on the project. Contractor and subcontractor personnel shall wear identifying markings on hard hats clearly identifying the company for whom the employee works.

1.1.3 Employee Parking

Contractor employees shall park privately owned vehicles in an area designated by the Contracting Officer. This area will be within reasonable walking distance of the construction site. Contractor employee parking shall not interfere with existing and established parking requirements of the facility.

1.3 AVAILABILITY AND USE OF UTILITY SERVICES

1.3.1 Payment for Utility Services

The Government will make all reasonably required utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount of each utility service consumed shall be paid for by the Government. The Contractor shall carefully conserve any utilities furnished without charge.

1.3.2 Temporary Connections

The Contractor, at its expense and in a workmanlike manner satisfactory to the Contracting Officer, shall provide, install, and maintain all necessary temporary connections, and distribution lines. The Contractor shall notify the Contracting Officer, in writing, 5 working days before final electrical connection is desired so that a utilities contract can be established. After inspection and approval of the Contractor's temporary wiring installation, the Contracting Officer will then inform the Facility to make the final service connection. Under no circumstance shall the Contractor make the final electrical connection. Other utility connections shall be made by the Contractor as directed by the Contracting Officer.

1.3.3 Sanitation

The Contractor shall provide and maintain within the construction area minimum field-type sanitary facilities approved by the Contracting Officer. Government toilet facilities will not be available to Contractor's personnel.

1.4 BULLETIN BOARD, PROJECT SIGN, AND PROJECT SAFETY SIGN

1.4.1 Bulletin Board

Within fifteen days after receipt of the Notice To Proceed, the Contractor shall provide a weatherproof bulletin board not less than 36 by 48 inches in size for displaying the Equal Employment Opportunity poster, a copy of the wage decision contained in the contract documents, Wage Rate Information poster, and other information required or approved by the Contracting Officer. The bulletin board shall be located at the project site in a conspicuous place, outside of the contractor's temporary office, easily accessible to all employees, as approved by the Contracting Officer. Legible copies of the aforementioned data shall be displayed until work under this contract is completed. Upon completion of work the bulletin board shall be removed by and remain the property of the Contractor.

1.4.2 Project and Safety Signs

The requirements for the signs, their content, and location shall be provided at a location designated by the Contracting Officer. The signs shall be erected within 15 days after receipt of the Notice to Proceed. The data required by the safety sign shall be corrected daily, with light colored metallic or non-metallic numerals. Upon completion of the project, the signs shall be removed and disposed of by the Contractor.

1.4.2.1 Project Sign

The project sign shall conform to the requirements as indicated on Attachment No.1, U.S. Air Force ACC MCP Project Sign Details attached hereto.

1.4.2.2 Safety Sign

The safety sign shall conform to the requirements as indicated on Attachment No.2, attached hereto. The data required by the sign shall be corrected daily, with light colored metallic or non-metallic numerals. Numerals, including mounting hardware, shall be subject to the approval of the CO.

1.4.2.3 Payment

No separate payment will be made for the sign work covered under this section of the specifications and all costs in connection therewith will be considered as a subsidiary obligation of the Contractor, covered by the contract prices in this contract.

1.5 PROTECTION AND MAINTENANCE OF TRAFFIC

During construction the Contractor shall provide access and temporary relocated roads as necessary to maintain traffic. The Contractor shall maintain and protect traffic on all affected roads during the construction period except as otherwise specifically directed by the Contracting Officer. Measures for the protection and diversion of traffic, including the provision of watchmen and flag men, erection of barricades, placing of lights around and in front of equipment and the work, and the erection and maintenance of adequate warning, danger, and direction signs, shall be as required by the State and local authorities having jurisdiction. The traveling public shall be protected from damage to person and property. The Contractor's traffic on roads selected for hauling material to and from the site shall interfere as little as possible with public traffic. The Contractor shall investigate the adequacy of existing roads and the allowable load limit on these roads. The Contractor shall be responsible for the repair of any damage to roads caused by construction operations.

1.5.1 Haul Roads

The Contractor shall, at its own expense, construct access and haul roads necessary for proper prosecution of the work under this contract. Haul roads shall be constructed with suitable grades and widths; sharp curves, blind corners, and dangerous cross traffic shall be avoided. The Contractor shall provide necessary lighting, signs, barricades, and distinctive markings for the safe movement of traffic. The method of dust control shall be adequate to ensure safe operation at all times. Location, grade, width, and alignment of construction and hauling roads shall be subject to approval by the Contracting Officer. Lighting shall be adequate to assure full and clear visibility for full width of haul road and work areas during any night work operations. Upon completion of the work, haul roads designated by the Contracting Officer shall be removed.

1.5.2 Barricades

The Contractor shall erect and maintain temporary barricades to limit public access to hazardous areas. Such barricades shall be required whenever safe public access to paved areas such as roads, parking areas or sidewalks is prevented by construction activities or as otherwise necessary to ensure the safety of both pedestrian and vehicular traffic. Barricades shall be

securely placed, clearly visible with adequate illumination to provide sufficient visual warning of the hazard during both day and night. Barricades and other physical protection shall be in accordance with EM 385-1-1.

1.6 CONTRACTOR'S TEMPORARY FACILITIES

1.6.1 Administrative Field Offices and Storage Areas

The Contracting Officer will designate an area within which the Contractor shall be permitted to place administrative or storage trailers for equipment and limited construction materials other than in trailers. The Contractor shall provide and maintain administrative field office facilities within the construction area at the designated site. Government office and warehouse facilities will not be available to the Contractor's personnel.

1.6.1.2 Storage Area(s)

The Contractor shall construct a temporary 6-foot high chain link fence around all trailers and materials. The fence shall include plastic strip inserts, colored brown, such that visibility through the fence is obstructed. Fence posts may be driven in lieu of concrete bases where soil conditions permit. No trailers, materials, or equipment shall be placed or stored outside the fenced area unless such trailers, materials or equipment are assigned a separate and distinct storage area by the CO away from the vicinity of the construction site but within the boundaries of the Post. At no time shall trailers, equipment or materials be open to public view with the exception of those items which are in support of ongoing work on any given day. Materials shall not be stockpiled outside the fence in preparation for the next day's work. At the end of each work day, mobile equipment such as tractors, wheeled lifting equipment, cranes, trucks and like equipment shall be parked within the fenced area.

1.6.1.3 Supplemental Storage Area(s)

Upon request of the Contractor, the CO will designate another or supplemental area for the Contractor's use and storage of trailers, equipment and materials. This area may not be in close proximity to the construction site, but shall be within the boundaries of the Post. Fencing of materials or equipment will not be required at this site; however, the Contractor shall be responsible for cleanliness and orderliness of the storage area used. The Contractor shall be responsible for the security of any materials or equipment stored in this area. No utilities will be provided to this area by the Government.

1.6.1.4 Appearance of Trailers

Trailers utilized by the Contractor, whether for the purpose of administrative use or materials storage, shall present a clean and neat exterior appearance and be in a state of good repair. Trailers which, in the opinion of the CO, are not in good repair shall not be allowed on the Post.

1.6.1.5 Equipment

Any item of construction equipment, with the exception of hand tools, which becomes inoperable shall be repaired within five (5) working days or removed from the construction site.

1.6.1.6 Maintenance of Storage Area(s)

It shall be the responsibility of the Contractor to keep all fencing in a state of good repair and proper alignment. Should the Contractor elect to traverse grassed or other areas without paving that are not established roadways, with construction equipment or other vehicles, such grassed or other areas shall be covered with a layer of gravel as necessary to prevent rutting and to prevent the tracking of mud onto paved or established roadways. Gradation of the gravel shall be at the discretion of the Contractor. The Contractor shall be responsible for the cutting of grass located within the boundaries of the construction site for the duration of the project. Grass and vegetation along fences, buildings, under trailers and in areas not accessible to mowers shall be edged or trimmed neatly.

1.6.1.7 Sanitation

It shall be the responsibility of the Contractor to provide and maintain minimum field-type sanitary facilities, approved by the CO, within the construction area. Present Government toilet facilities will not be available to the Contractor's personnel.

1.6.2 Security Provisions

Adequate outside security lighting shall be provided at the Contractor's temporary facilities. The Contractor shall be responsible for the security of its own equipment; in addition, the Contractor shall notify the appropriate law enforcement agency requesting periodic security checks of the temporary project field office.

1.7 CLEANUP

Construction debris, waste materials, packaging material and the like shall be removed from the work site daily. Any dirt or mud which is tracked onto paved or surfaced roadways shall be cleaned away. Materials resulting from demolition activities which are salvageable shall be stored within the fenced area described above or at the supplemental storage area. Stored material not in trailers, whether new or salvaged, shall be neatly stacked when stored.

1.11 RESTORATION OF STORAGE AREA

Upon completion of the project and after removal of trailers, materials, and equipment from within the fenced area, the fence shall be removed and will become the property of the Contractor. Areas used by the Contractor for the storage of equipment or material, or other use, shall be restored to the original or better condition. Gravel used to traverse grassed areas shall be removed and the area restored to its original condition, including top soil and seeding as necessary.

PART 2 PRODUCTS (NOT APPLICABLE)

PART 3 EXECUTION (NOT APPLICABLE)









