SUMMARY OF IMPACTS TABLE

IMPACT AREA	WETLAND IMPACT AREA (SQ. FT./ACRES)	STREAM IMPACT DESCRIPTION (LENGTH & WIDTH)	WETLAND TYPE (COWARDIN)	WETLAND IMPACT DESCRIPTION
1	N/A	123 LF; 1' WIDE	R4SB2	NT; NV, PE, IN
2	N/A	138 LF; 4' WIDE	R3RB1	NT; NV, PE, PR
3	N/A	156 LF; 4' WIDE	R3RB1	NT; V, PE, PR
TOTALS	417 LF; 1,299 SQ. FT.			

T=TIDAL; NT=NONTIDAL; V=VEGETATED; NV=NONVEGETATED; TE=TEMPORARY
PE= PERMANENT; PR=PERENNIAL; IN=INTERMITTENT

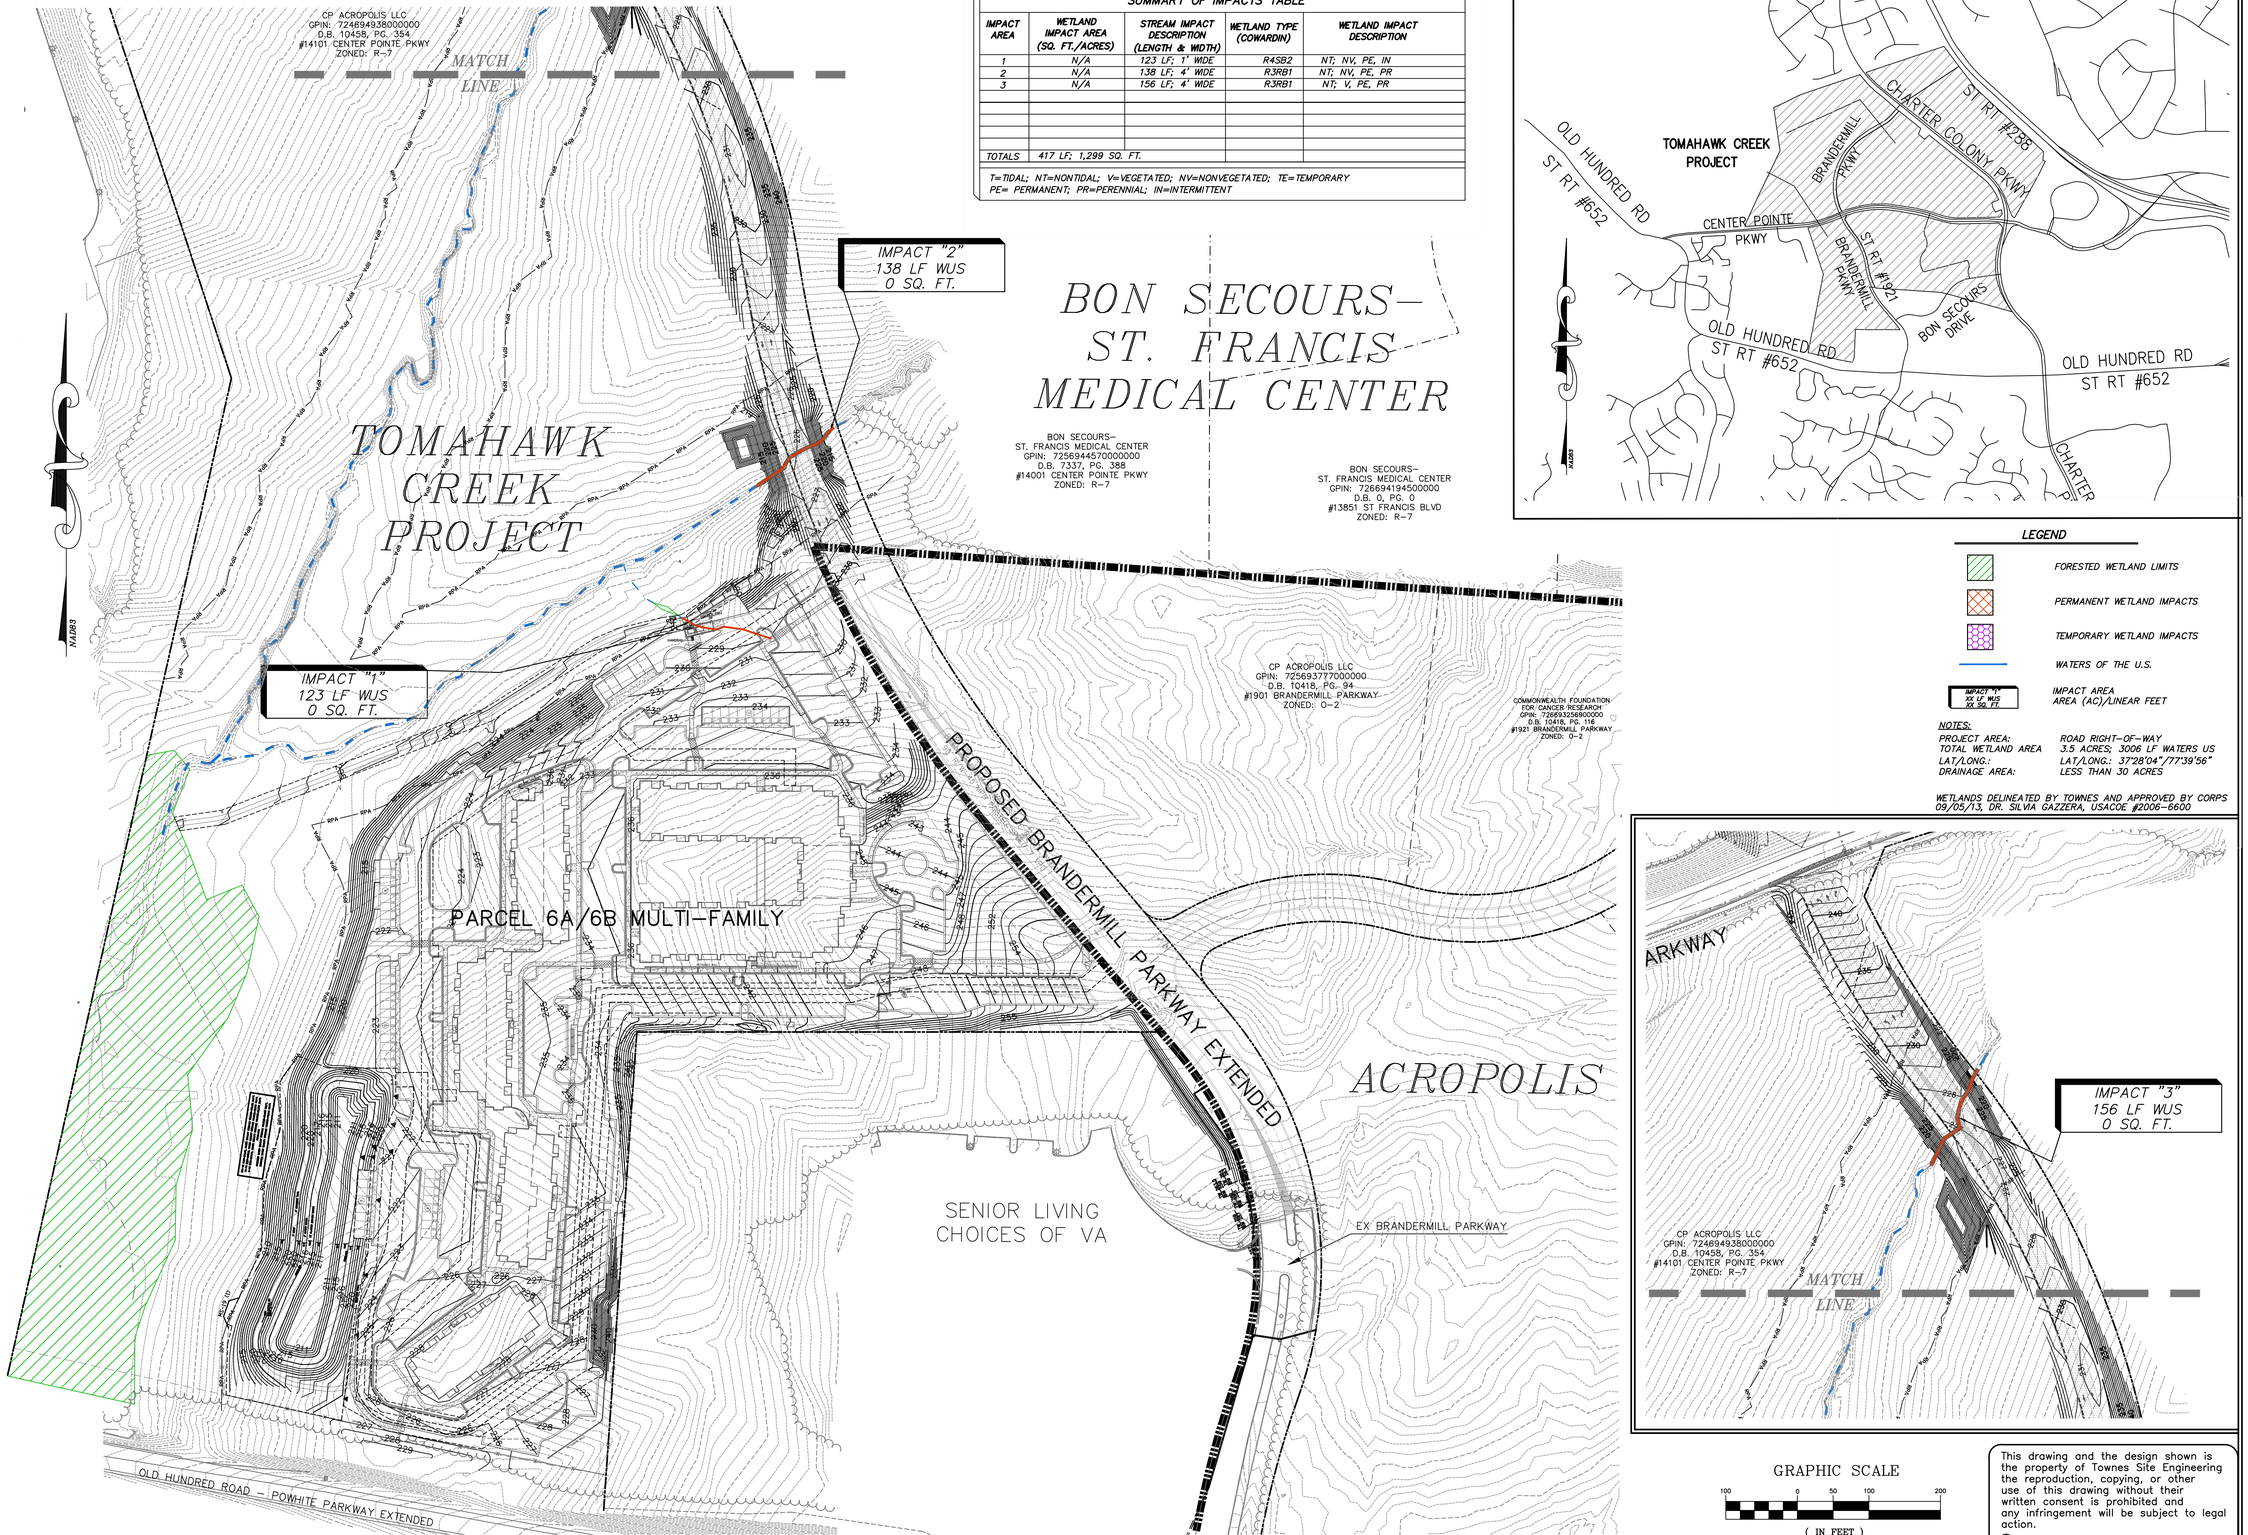

LEGEND

- FORESTED WETLAND LIMITS
- PERMANENT WETLAND IMPACTS
- TEMPORARY WETLAND IMPACTS
- WATERS OF THE U.S.
- IMPACT "X" XX LF WUS XX SQ. FT. — IMPACT AREA AREA (AC)/LINEAR FEET

NOTES:

PROJECT AREA:	ROAD RIGHT-OF-WAY
TOTAL WETLAND AREA	3.5 ACRES; 3006 LF WATERS US
LAT/LONG.:	LAT/LONG.: 37°28'04"/77°39'56"
DRAINAGE AREA:	LESS THAN 30 ACRES

WETLANDS DELINEATED BY TOWNES AND APPROVED BY CORPS 09/05/13, DR. SILVIA GAZZERA, USACOE #2006-6600

GRAPHIC SCALE
100 0 50 100 200
(IN FEET)
1 inch = 100 ft.

This drawing and the design shown is the property of Townes Site Engineering the reproduction, copying, or other use of this drawing without their written consent is prohibited and any infringement will be subject to legal action.
© 2014
Townes Site Engineering

Townes
SITE ENGINEERING
9850 Lori Road, Suite 201
Chesterfield, Virginia 23832
Phone:(804) 748-9011 Fax: (804) 748-2590
ASK US HOW

TOMAHAWK CREEK PROJECT
BRANDERMILL PKWY EXTENSION
CHESTERFIELD COUNTY, VIRGINIA

WETLAND IMPACTS

REVISIONS

DATE	ITEM

DATE 2/7/14
SCALE 1" = 100'
PROJECT MANAGER T.HOUSTON
CHECKED BY
PROJ.# 20120358
SHEET # W-1